

am[®] AS6221T

Datasheet

Published by ams-OSRAM AG

Tobelbader Strasse 30, 8141 Premstaetten, Austria

Phone +43 3136 500-0

ams-osram.com

© All rights reserved

am[®] OSRAM

Table of contents

1	General description	3
1.1	Key benefits & features.....	3
1.2	Applications	4
1.3	Block diagram	4
2	Ordering information	5
3	Pin assignment	5
3.1	Pin diagram.....	5
3.2	Pin description	6
4	Absolute maximum ratings	6
5	Operating conditions	7
5.1	Analog system parameters	7
5.2	Digital system parameters	9
5.3	Thermal information.....	10
6	Register description	11
6.1	Register overview	11
6.2	Detailed register description	12
6.3	Serial interface.....	22
7	Application information.....	31
7.1	External components	33
8	Package drawings & markings	34
9	Revision information	35
10	Legal information	36

AS6221T Digital temperature sensor

1 General description

The AS6221T IC is a high accuracy digital temperature sensor system that communicates via a 2-wire digital bus with other devices. It consists of a Si bandgap temperature sensor, an ADC and a digital signal processor.

This sensor is especially designed to be used in applications where a high measurement accuracy is needed, for example measuring the skin temperature. Beside these applications, it can also be used to replace PTC resistors.

The high temperature accuracy and an ultra-low power consumption (low operation and quiescent current) makes the AS6221T ideally suited for mobile/battery powered applications.

The AS6221T is an easy to integrate and use solution, featuring a factory-calibrated sensor, integrated linearization and the possibility to use 8 different I²C addresses, enabling to use eight AS6221T devices on one bus.

Additionally, the AS6221T temperature sensor system features an alert functionality, which triggers e.g. an interrupt to protect devices from excessive temperatures.

The AS6221T production test setup is calibrated according NIST and the verification equipment is calibrated by an ISO/IEC-17025 accredited laboratory.

1.1 Key benefits & features

The benefits and features of AS6221T are listed below:

Table 1: Added value of using AS6221T

Benefits	Features
High measurement accuracy	$\pm 0.09\text{ }^{\circ}\text{C}$ (20 $^{\circ}\text{C}$ to 42 $^{\circ}\text{C}$)
Low power consumption	6 μA @ Operation (typical, @ 4 Hz) 0.1 μA @ Standby (typical)
Supply voltage range	1.71 – 1.98 V (0 $^{\circ}\text{C}$ to 60 $^{\circ}\text{C}$)
Small PCB footprint	1.5 mm x 1 mm (WLCSP)


1.2 Applications

- Fitness/health wristbands
- Personal computers
- Wearables
- HVAC
- Replacement of PTCs
- Electronic equipment
 - Tablets
 - Convertibles
 - Laptop

1.3 Block diagram

The functional blocks of this device are shown below:

Figure 1: Functional blocks of AS6221T

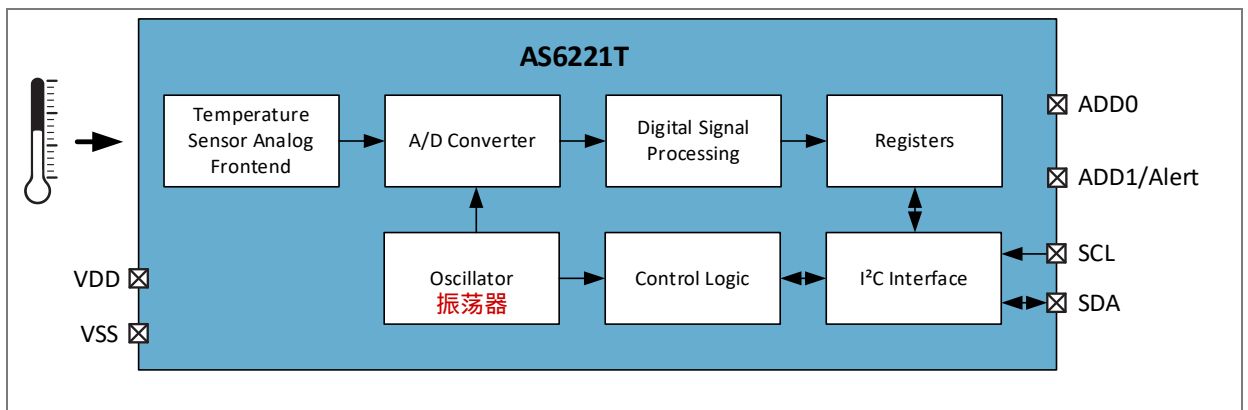

In Figure 1, the functional blocks are depicted. The sensing element for sensing the temperature is a **Si bipolar transistor**. The analog signal of the sensing element is converted into a digital signal by the A/D converter and the signal is further processed by a digital signal processor and written into the registers. The registers can be accessed via the serial bus interface (I²C bus) 通过.


2 Ordering information

Ordering code	Package	Marking	Delivery form	Delivery quantity
AS6221T-AWLM	WLCSP	AS622T	Tape & Reel	500 pcs/reel
AS6221T-AWLT	WLCSP	AS622T	Tape & Reel	12000 pcs/reel

3 Pin assignment (引脚分配)

3.1 Pin diagram

Figure 2: Pin assignment WLCSP

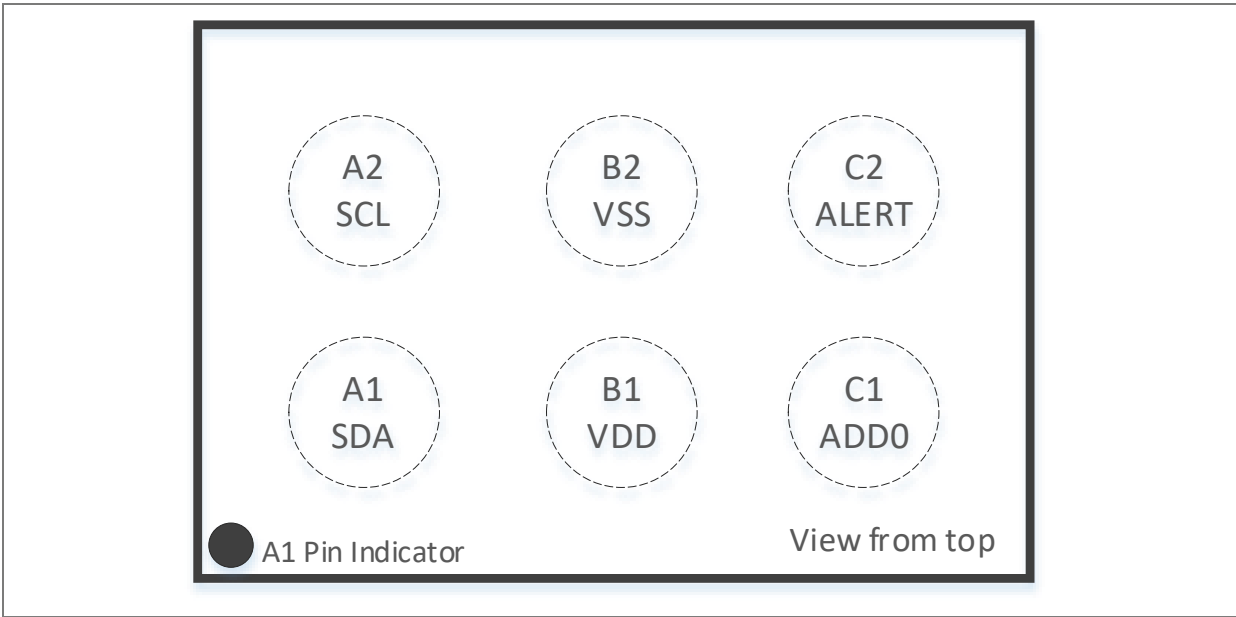

In Figure 2, the pin assignment of the WLCSP package is shown. The viewing side is from the top. The A1 pin is also marked with a point on the top side.

3.2 Pin description (管脚定义)

Table 2: Pin description of AS6221T (WLCSP)

Pin number	Pin name	Pin type ⁽¹⁾	Description
A1	SDA	DIO_SOD	Serial interface data
A2	SCL	DI_S	Serial interface clock
B1	VDD	S	Positive supply voltage
B2	VSS	S	Ground pin
C1	ADD0	DI_S	Address select 0
C2	ALERT/ADD1	DIO_SOD	Alert output and address select 1

- (1) Explanation of abbreviations: 缩写解释
- | | |
|---------|--|
| S | Supply |
| DI_S | Digital Schmitt trigger input (数字施密特触发输入) |
| DIO_SOD | Digital Schmitt trigger input / Open drain output (开漏输出) |

In Table 2, the pins of AS6221T are described. External pull up resistors (to VDD) are necessary for the pins “SDA” and “SCL”. 外部上拉电阻

The pin “ADD0” must not be left unconnected (refer to section 6.3.3 for further details).

The pin “ALERT/ADD1” is used to set the I²C address and has the additional functionality of triggering an interrupt. In case this ALERT functionality is used, a pull up resistor (to VDD) is necessary. If this functionality is not used it must be connected to VSS or SCL, depending on the selected I²C address (refer to section 6.3.3 for further details). It must not be left unconnected.

4 Absolute maximum ratings

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only. Functional operation of the device at these or any other conditions beyond those indicated under “Operating Conditions” is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 3: Absolute maximum ratings of AS6221T

Symbol	Parameter	Min	Max	Unit	Comments
Electrical parameters					
V _{DD} / V _{SS}	Supply voltage to VSS	-0.3	4	V	Reference to VSS
VDIO	IO pin voltage	-0.3	4	V	Reference to VSS
I _{SCR}	Input current (latch up immunity)	-100	100	mA	According to JESD78E
Electrostatic discharge					
ESD _{HBM}	Electrostatic discharge HBM	±2000		V	JS-001-2023
ESD _{CDM}	Electrostatic discharge CDM	±500		V	JS-002-2022
Temperature ranges and storage conditions					
T _A	Operating ambient temperature	-40	125	°C	
T _J	Operating junction temperature	-40	125	°C	
T _{STRG}	Storage temperature range	-55	125	°C	
T _{BODY}	Package body temperature		260	°C	IPC/JEDEC J-STD-020 ⁽¹⁾
R _{HNC}	Relative humidity (non-condensing)	5	85	%	
MSL	Moisture sensitivity level	1			Unlimited floor lifetime

(1) The reflow peak soldering temperature (body temperature) is specified according to IPC/JEDEC J-STD-020 "Moisture/Reflow Sensitivity Classification for Nonhermetic Solid State Surface Mount Devices".

5 Operating conditions

The AS6221T is a complete sensor system that has an integrated sensing element, the analog frontend, the A/D converter and the digital signal processing part.

The digital signal processing part consists of the signal processor, the registers and the serial bus interface.

5.1 Analog system parameters

Table 4: Analog system parameters of AS6221T

Parameter	Symbol	Min	Typ	Max	Unit	Note
Supply voltage	VDD	1.71	1.8	1.98	V	T= 0 °C to 60 °C
Temperature range	T	0		60	°C	

Parameter	Symbol	Min	Typ	Max	Unit	Note
Standby current consumption	IDD		0.1	0.7	μA	T= 0 °C to 45 °C
				1.5	μA	T= 45 °C to 60 °C
Current consumption (4 conversions /s)	IDD		6	8	μA	T= 0 °C to 45 °C Serial bus inactive
				9.5	μA	T= 45 °C to 60 °C Serial bus inactive
Resolution	N		16		Bits	
Conversion time	TS	22	36	51	ms	
Conversion rate	NS		0.25 1 4 8		Conv/s	CR[1:0]=00 CR[1:0]=01 CR[1:0]=10 CR[1:0]=11
Supply voltage rise time	TRise_VDD			20	ms	from 0.1 V to 1.6 V
Supply voltage slew rate	SR_VDD	50			mV/ms	from 0.1 V to 1.6 V

In Table 4, an overview of the analog system parameters is given.


The current consumption for less than 4 conversions per second is lower than the values given in Table 4.

Table 5: Temperature accuracy values of AS6221T

Variant	Symbol	Min	Typ	Max	Unit	Note
		-0.09		0.09		T= 20 °C to 42 °C
AS6221T	T_ERR	-0.1		0.1	°C	T= -25 °C to 55 °C
		-0.12		0.12		T= 55 °C to 60 °C

In Table 5, the different accuracy values of AS6221T are shown. These values are representative for a 3σ distribution. All accuracy values are valid for the complete supply voltage range given in Table 4.

Figure 3: Graphical representation of accuracy values

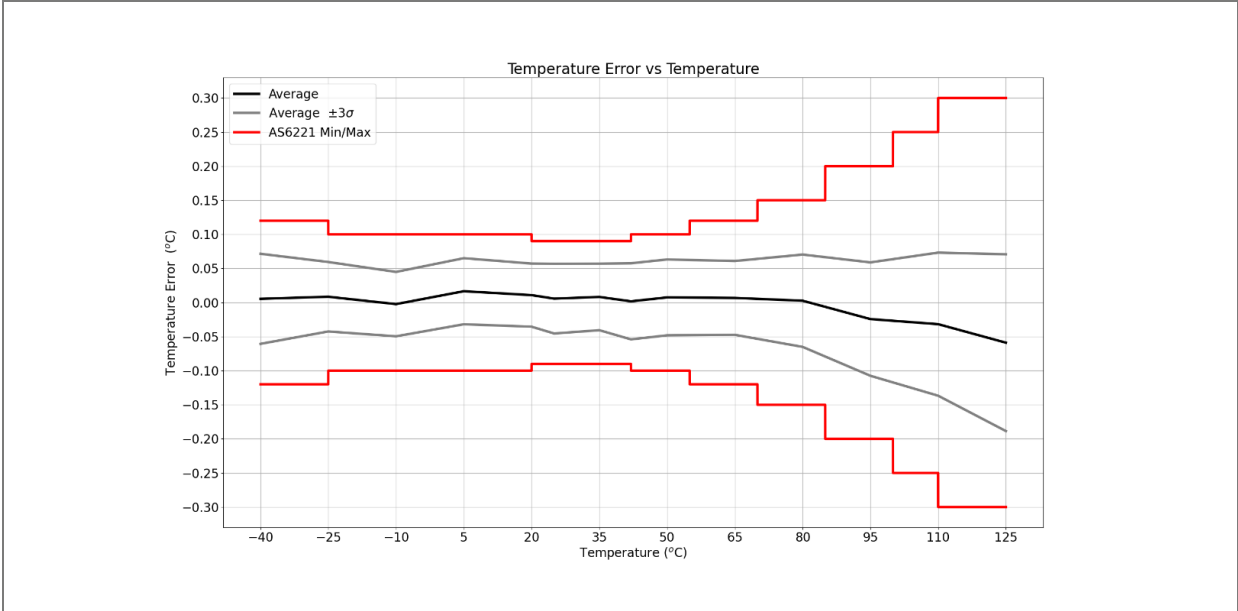

In Figure 3, the temperature error is plotted against the temperature. This graph represents the actual measurement of typical samples which have been mounted onto PCBs.

5.2 Digital system parameters

Table 6: Digital system parameters of AS6221T

Parameter	Symbol	Pins	Min	Typ	Max	Unit	Note
High level input voltage	V_IH	SCL, ADD0	0.7 * VDD			V	
Low level input voltage	V_IL	SCL, ADD0			0.3 * VDD	V	
Hysteresis voltage	V_HYST	SCL, ADD0, SDA, Alert		700		mV	
Input leakage current	I_LEAK	SCL; ADD0	-1		1	μA	V_IL=0.0 V
Low level output voltage	V_OL	Alert			VSS+0.4	V	I_OL=3 mA
High level input voltage	V_IH	SDA	0.7 * VDD			V	
Low level input voltage	V_IL	SDA			0.3*VDD	V	

Parameter	Symbol	Pins	Min	Typ	Max	Unit	Note
Low level output Voltage	V_OL	SDA			VSS+0.4	V	
Tristate leakage current	I_OZ	SDA	-10		10	μA	to VSS

In Table 6, an overview of the digital system parameters is given.

5.3 Thermal information


Table 7: Thermal information of AS6221T

Parameter	Symbol	Value	Unit
Junction to case (top) thermal resistance	R _{JC}	33.4	K/W
Junction to ball (not board) thermal resistance	R _{JB}	9	K/W
Case to ambient thermal resistance	R _{CA}	31056	K/W
Junction to ambient thermal resistance (top) R _{JC} + R _{CA}	R _{JA}	31089.4	K/W
Thermal mass	Mt	1	mJ/K

6 Register description (寄存器描述)

6.1 Register overview

Figure 4: Register map with serial interface

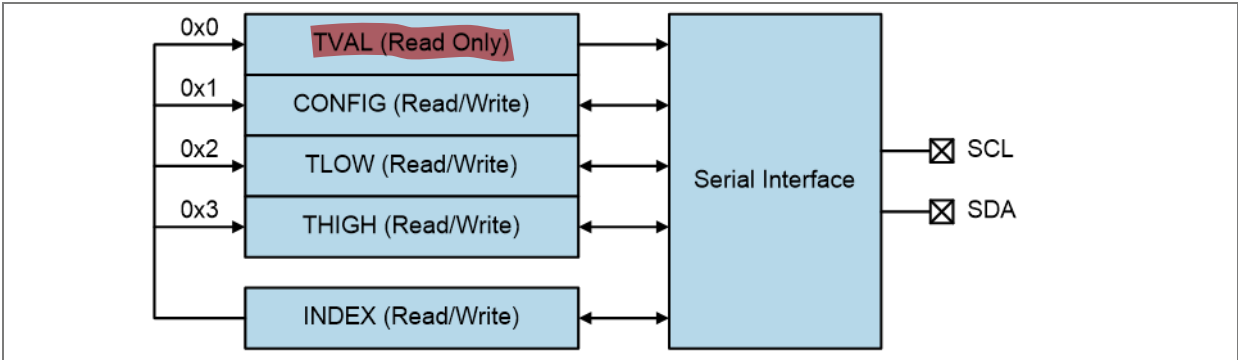

In Figure 4, the registers that the device contains are shown.

With the use of the index register, it is possible to address the specific register. The index register is an 8-bit register, where only bits 0 and 1 are used as shown in Table 8 and all other bits are set to 0 and read only.

6.1.1 Index register (索引寄存器)

Table 8: INDEX register

Bit	Bit name	Default	Access
0	Address bit	0	RW
1	Address bit	0	RW
2	Reserved	0	RO
3	Reserved	0	RO
4	Reserved	0	RO
5	Reserved	0	RO
6	Reserved	0	RO
7	Reserved	0	RO

Table 9: Register map

Address	Symbol	Register	Description
0x0	TVAL	Temperature register	Contains the temperature value
0x1	CONFIG	Configuration register	Configuration settings of the temperature sensor
0x2	TLOW	T _{LOW} register	Low temperature threshold value(低温閾値)
0x3	THIGH	T _{HIGH} register	High temperature threshold value(高温閾値)

The first 2-bit addresses in the index register define the access to the registers shown in Table 9. This means that in order to access the different registers, the index register must be set accordingly. With the exception of the TVAL register (which contains the temperature value data), all registers are read/write accessible.

6.2 Detailed register description

6.2.1 Configuration register (Address 0x1) (配置寄存器)

Table 10: CONFIGURATION register

Addr: 0x1		Configuration		
Bit	Bit name	Default	Access	Bit description
0	Reserved	0	RO	Reserved
1	Reserved	0	RO	Reserved
2	Reserved	0	RO	Reserved
3	Reserved	0	RO	Reserved
4	Reserved	0	RO	Reserved
5	AL	1	RO	Alert Bit (AL)
6	CR[0]	0	RW	Conversion RATE (CR)
7	CR[1]	1	RW	Conversion RATE (CR)
8	SM	0	RW	Sleep Mode (SM)
9	IM	0	RW	Interrupt Mode (IM)
10	POL	0	RW	Polarity (POL)
11	CF[0]	0	RW	Consecutive Faults (CF)
12	CF[1]	0	RW	Consecutive Faults (CF)

Addr: 0x1		Configuration		
Bit	Bit name	Default	Access	Bit description
13	Reserved	0	RO	Reserved
14	Reserved	1	RO	Reserved
15	SS	0	RW	Single Shot

The configuration register is a 16-bit register which defines the operation modes of the device. Any read/write operation processes the MSB byte first.

In Table 10, the configuration register is shown. The bits 0-4 and 13-14 are not to be used and are set to read only. The explanation of the other bits are detailed in the following sections.

6.2.2 Alert bit (报警位)


The alert bit can be used to easily compare the current temperature reading to the thresholds that can be set in the TLOW and THIGH registers.

If the polarity bit is set to 0, the AL bit is read as 1 until the converted temperature value exceeds the defined value in the high temperature threshold register THIGH for the number of defined consecutive faults (bits CF). Such an event causes the AL bit to toggle to 0 and the value is kept until the converted temperature value falls below the defined value in the low temperature threshold register TLOW for the number of defined consecutive faults. If this condition is met, the AL bit is reset to 1.

The polarity bit (POL) defines the active state of the alert bit as depicted in the following figure.

The alert bit has the same setting as the alert output as long as the device is configured for the comparator mode.

Figure 5: State diagram of the alert bit

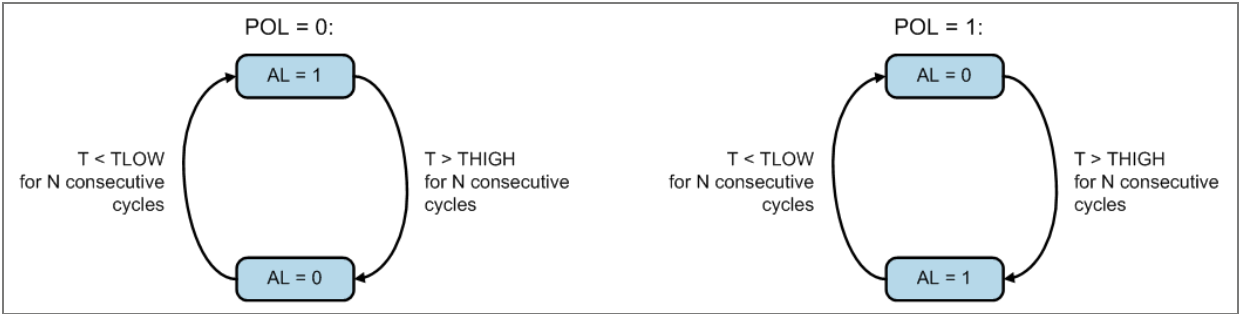

6.2.3 Conversion rate bits (转换速率位)

The conversion rate bits define the number of executed temperature conversions per time unit. Additional readouts of the temperature register between conversions are possible but not recommended because the value is changed only after a conversion is finished.


Values of 125 ms, 250 ms, 1 s and 4 s for a conversion can be configured while the default rate is set to 4 conversions per second. The following table summarizes the different configuration settings: 125ms转换一次、250ms转换一次、1s转换一次、4s转换一次

Table 11: Conversion rate configuration

Conversion rate bits		Conversion rate	
Bit 7	Bit 6	Conv/s	
0	0	0.25	1秒转换0.25次
0	1	1	1秒转换1次
1	0	4	1秒转换4次
1	1	8	1秒转换8次

The device immediately starts a conversion after a power-on sequence and provides the first result after typ. 36 ms (max. 51 ms). A higher power consumption occurs during the actual conversion while the device stays in the standby mode after a finished conversion until the next conversion is activated. This is shown in the following figure.

Figure 6: Conversion sequence (转换时序)

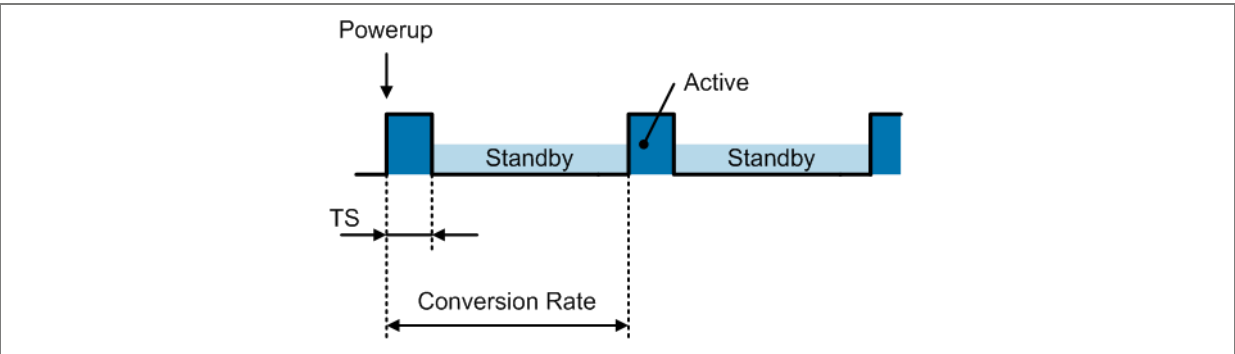

6.2.4 Sleep mode (睡眠模式)

The sleep mode is activated by setting the bit SM in the configuration register to 1. This shuts the device down immediately and reduces the power consumption to a minimum value.

The serial interface is the only active circuitry in sleep mode in order to provide access to the digital registers. 睡眠模式下只有串行接口电路工作

Entering the sleep mode will take some time (120 ms maximum) and the first conversion after the sleep mode has been entered takes longer than the values specified in Table 4. It is therefore recommended when entering sleep mode to trigger a single shot conversion at the same time. After 150 ms (max), the device has then entered the sleep mode and subsequent conversion times are as specified in Table 4.

After resetting the SM bit to 0, the device enters the continuous conversion mode.

Table 12: Sleep mode configuration

Sleep mode bit	Operation mode
0	Continuous conversion mode
1	Sleep mode

6.2.5 Interrupt mode (中断模式)

The interrupt mode bit defines whether the device operates in the temperature comparator mode or the interrupt mode. This defines the operation of the ALERT output as described in the polarity section bit.

Table 13: Interrupt mode configuration


Interrupt mode bit	Configuration mode
0	Comparator mode
1	Interrupt mode

The comparator mode is characterized that if the temperature value exceeds the THIGH value, the alert output is changed (e.g. from high to low if the polarity bit is set to 0 and vice versa). The alert output stays in that condition until the measured temperature drops below the defined TLOW value.

The interrupt mode is characterized that it changes the alert output as soon as the measured temperature crosses the THIGH or TLOW value threshold.

The alert bit has the same setting as the alert output if the device is set to comparator mode.

Figure 7: Alert output functionality

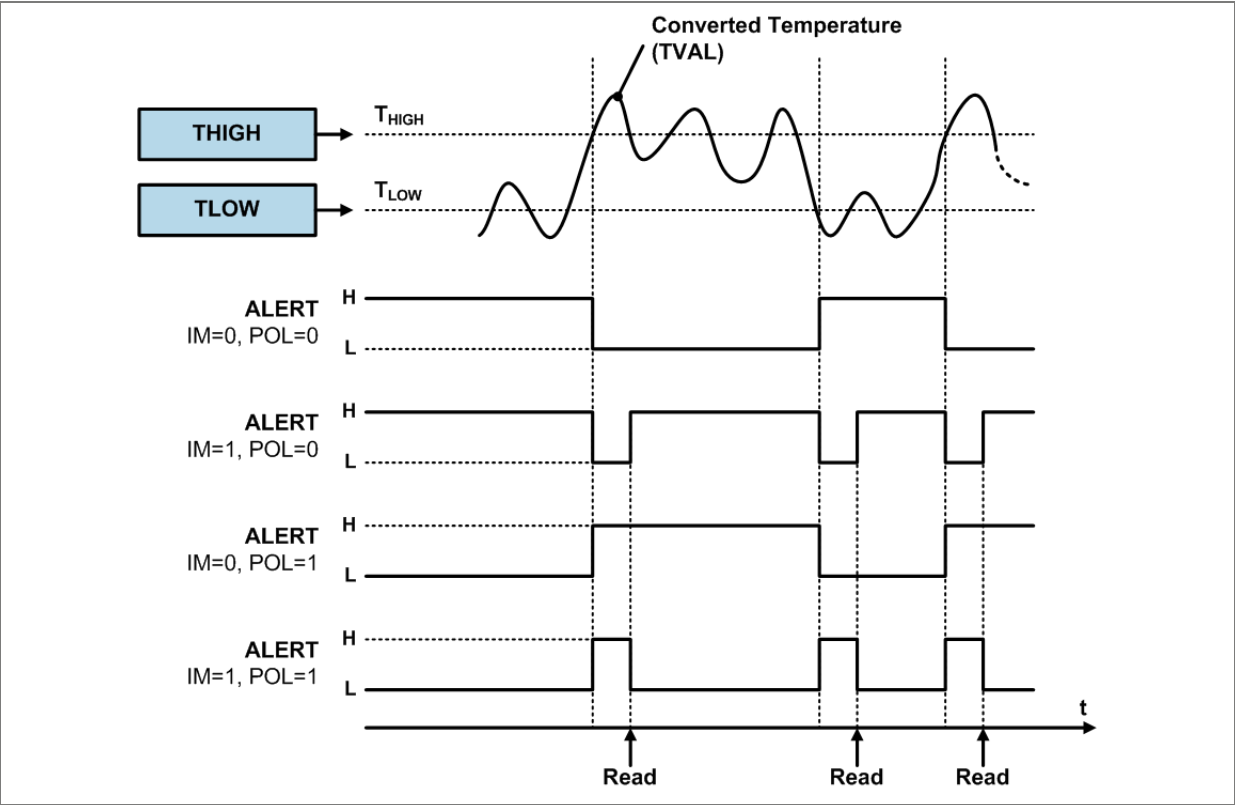

6.2.6 Polarity bit (极性位)

Table 14: Polarity bit configuration

Polarity bit	ALERT output	
0	Active low	极性位为0，低电平报警
1	Active high	极性位为1，高电平报警

6.2.7 Consecutive faults

A fault condition persists if the measured temperature either exceeds the configured value in register THIGH or falls below the defined value in register TLOW. As a result, the ALERT pin

indicates the fault condition if a defined number of consecutive temperature readings meets this fault condition. The number of consecutive faults are defined with two bits (12 and 11) and prevent a false alert if environmental temperature noise is present. The register configuration is shown in the following table.

Table 15: Consecutive fault bit settings

Consecutive fault bits		Consecutive faults (N)
Bit 12	Bit 11	
0	0	1
0	1	2
1	0	3
1	1	4

6.2.8 Single shot conversion

The device features a single shot measurement mode if the device is in sleep mode (SM=1). By setting the “Single Shot-bit” to 1, a single temperature conversion is started and the SS-bit can be read as 1 during the active conversion operation. Once the conversion is completed, the device enters the sleep mode again and the SS-bit is set to 0. The single shot conversion allows very low power consumption since a temperature conversion is executed on demand only. This allows a user defined timing of the temperature conversions to be executed and is used if the consecutive operation mode is not required.

The first conversion triggered in this mode has a longer conversion time. In the section 6.2.4 it is detailed together with the recommendation to trigger the first conversion simultaneously with entering the sleep mode.

As the device exhibits a very short conversion time, the effective conversion rate can be increased by setting the single shot bit repetitively after a conversion has finished. However, it has to be ensured that the additional power is limited, otherwise self-heating effects have to be considered.

Table 16: Single shot conversion bit settings

Single shot bit	Conversion
0	No conversion ongoing/ conversion finished
1	Start single shot conversion / conversion ongoing

6.2.9 High and low limit registers

If the comparator mode is configured (IM=0), the ALERT output becomes active if the temperature equals or exceeds the defined value in register THIGH for the configured number of consecutive faults (N). This configuration is defined by the field CF in the configuration register. The ALERT output remains assigned until the converted temperature value equals or falls below the defined value in register TLOW for the same number of consecutive fault cycles.


If the interrupt mode is configured (IM=1), the ALERT output becomes active if the temperature equals or exceeds the defined value in register THIGH for the configured number of consecutive fault cycles. It remains active until a read operation is executed on any register. The ALERT output is also cleared if the device is set into sleep mode by setting bit SM in the configuration register.

Once the ALERT output is cleared, it is activated again only if the temperature value falls below the configured value in register TLOW. It remains active unless a read operation has taken place.

This sequence is repeated unless the device is set into the comparator mode. This reset command clears the interrupt mode bit and consequently puts the device into the comparator mode.

The sequential behavior is summarized in the following Figure 8.

Figure 8: Alert operation modes

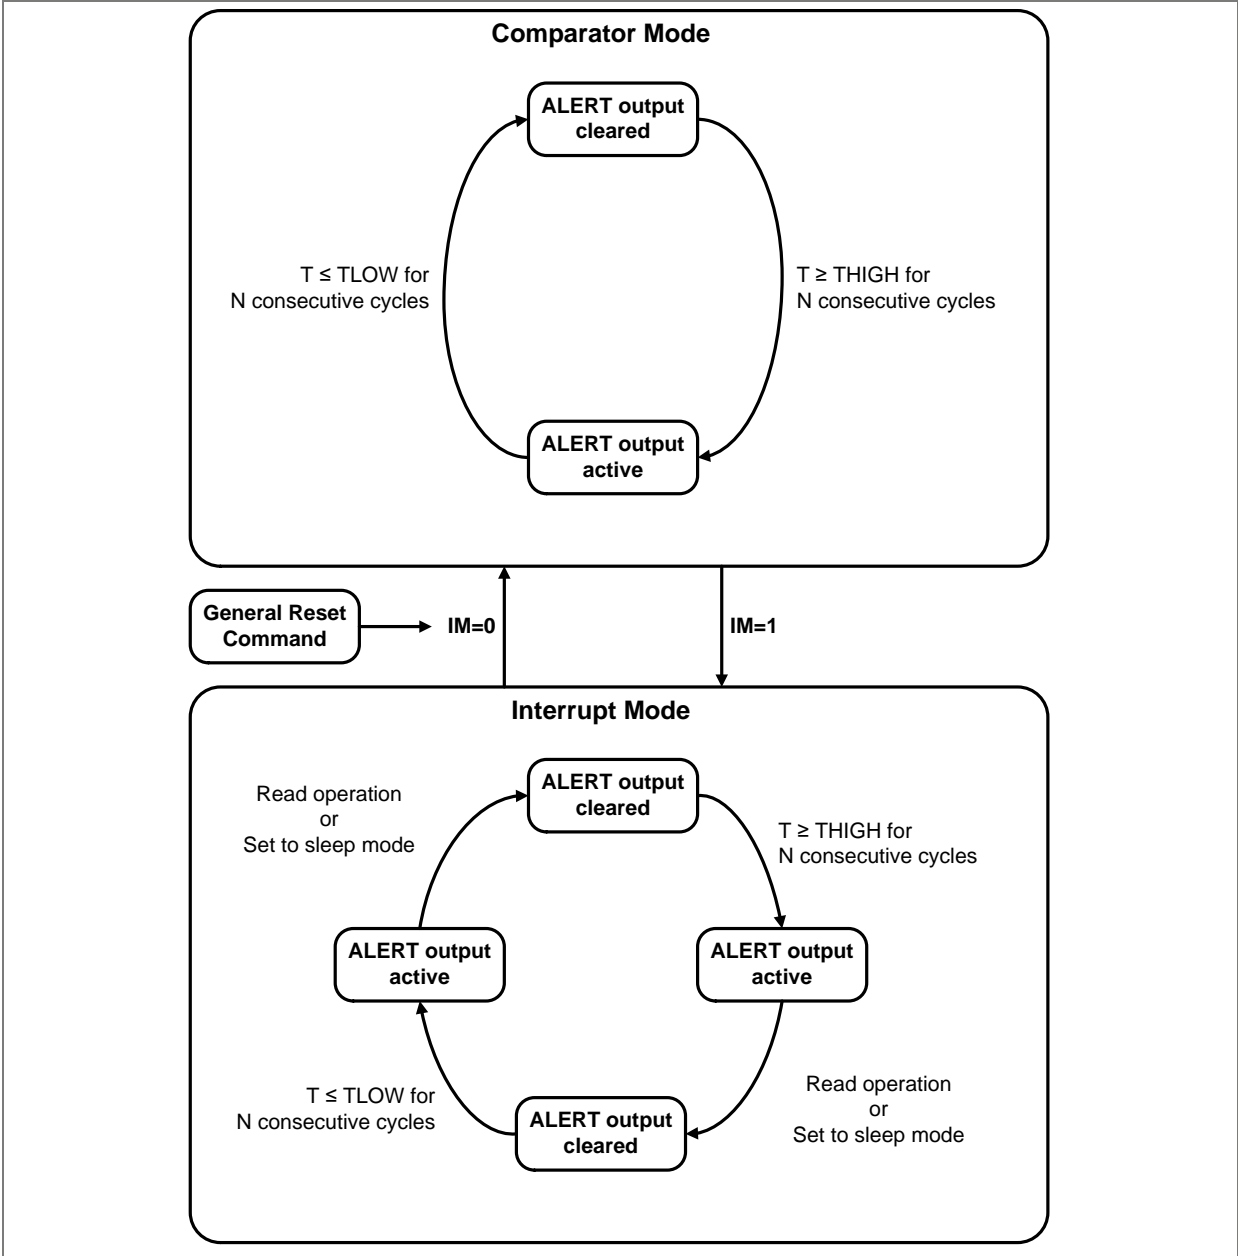

The following table defines the content of the registers TLOW and THIGH. For data transmission, the MSB byte is transmitted first, followed by the LSB byte. The data format for representing the threshold temperatures is equal to the temperature register (TVAL). After a power-up, the registers are initialized with the following default values:

Table 17: Default values for THIGH and TLOW

Register	Temperature	Binary value
TLOW	Programmable	0010 0101 1000 0000 (75°C)
THIGH	Programmable	0010 1000 0000 0000 (80°C)

The following table defines the register bits of the THIGH and TLOW register.

Table 18: Register bit settings for THIGH/TLOW

Addr: 0x2 / 0x3

Bit	TLOW register	THIGH register	Access
0	0	0	Permanently set to 0
1	0	0	Permanently set to 0
2	0	0	Permanently set to 0
3	0	0	Permanently set to 0
4	L4	H4	RW
5	L5	H5	RW
6	L6	H6	RW
7	L7	H7	RW
8	L8	H8	RW
9	L9	H9	RW
10	L10	H10	RW
11	L11	H11	RW
12	L12	H12	RW
13	L13	H13	RW
14	L14	H14	RW
15	L15	H15	RW

6.2.10 Temperature register (Address 0x0)

Table 19: TEMPERATURE value register

Addr: 0x0

Bit	Bit name
0	T0
1	T1
2	T2
3	T3
4	T4
5	T5
6	T6
7	T7
8	T8
9	T9
10	T10
11	T11
12	T12
13	T13
14	T14
15	T15

The temperature register contains the digitally converted temperature value and can be read by setting the index pointer to the TVAL register (0x0).

获取完整温度值要读取两个字节 Two consecutive bytes must be read to obtain the complete temperature value. The MSB byte (Bits 15 to 8) is transmitted upon the first read access and the LSB byte (Bits 7 to 0) is transmitted after the second read access. 高字节传输在前，低字节传输在后

A temperature value is represented as a two complement value in order to cover also negative values. After power-up, the temperature value is read as 0 °C until the first conversion has been completed. One LSB corresponds to 0.0078125 °C (=1/128 °C).

The binary values can be calculated according to the following formulas:

- Positive values: |Value| / LSB
- Negative values: Complement (|Value| / LSB) + 1

Example 50 °C:

$50^{\circ}\text{C} / 0.0078125^{\circ}\text{C} = 6400 = \text{Binary } 0001\ 1001\ 0000\ 0000 = \text{Hex } 1900$

Table 20: Temperature conversion examples

Temperature (°C)	Digital output (Binary)	Digital output (Hex)
60.0	0001 1110 0000 0000	1E00
50.0	0001 1001 0000 0000	1900
25.0	0000 1100 1000 0000	0C80
0.125	0000 0000 0001 0000	0010
0.0078125	0000 0000 0000 0001	0001
0.0	0000 0000 0000 0000	0000

6.3 Serial interface 串行接口

The device employs a standard I²C-serial bus. 设备采用标准的I2C串行总线

6.3.1 Bus description (总线描述)

A data transfer must be **invoked** by a master device (e.g. microcontroller) which defines the access to the slave device. The master device defines and generates the serial clock (SCL) and the start/stop conditions.

In order to address a specific device, a START condition has to be generated by the master device by pulling the data line (SDA) from a logic high level to a logic low level while the serial clock signal (SCL) is kept at high level. SCL保持高电平，主设备将SDA从高电平拉至低电平，以生成起始条件

After the start condition, the slave address byte is transmitted which is completed with a ninth bit which indicates a read (bit='1') or a write operation (bit='0') respectively. All slaves read the data on the rising edge of the clock. An acknowledge signal is generated by the addressed slave during the ninth clock pulse. This acknowledge signal is produced by pulling the pin SDA to a low level by the selected slave. 起始条件后，发送带有读写位的从设备地址，从设备响应应答

Subsequently, the byte data transfer is started and finished by an acknowledge bit. A change in the data signal (SDA) while the clock signal (SCL) is high causes a START or STOP condition. Hence, it must be ensured such a condition is prevented during a data transfer phase. 字节传输的开始与结束由应答位决定，当SCL为高电平时，SDA电平的变化会造成起始或结束条件的产生，因此，在数据传输时，不允许SCL为高电平时SDA电平发生变化

After completing the data transfer, the master generates a STOP condition by pulling the data line (SDA) from low level to high level while the clock signal (SCL) is kept at high level.

数据传输完成后，主设备通过当SCL为高电平时将SDA由低电平拉高至高电平产生结束条件

6.3.2 Data interface

A bus connection is created by connecting the open drain input/output lines SDA and SCL to the two wire bus. The inputs of SDA and SCL feature Schmitt-trigger inputs as well as low pass filters in order to suppress noise on the bus line. This improves the robustness against spikes on the two wire interface.

Both fast transmission mode (1 kHz to 400 kHz) and high-speed transmission mode (1 kHz to 3.4 MHz) are employed to cover different bus speed settings.

Any data transfer transmits the MSB first and the LSB as last bit.

6.3.3 Bus address

A slave address consists of seven bits, followed by a data direction bit (read/write operation). The slave address can be selected from 8 different address settings by connecting the pin ADD0 and ADD1 to an appropriate signal as summarized in Table 21.

The ADD0 and the ADD1 pin must not be left unconnected.

The address selection with ADD1 is depending on the usage of the ALERT function (described in chapter 6.3.8). In case the ALERT functionality is used, it must be connected via a pull up resistor to VDD. In case the ALERT functionality is not used, the pin must be connected to either SCL or VSS (refer to Table 21 for details).

Table 21: I²C address select configuration

ALERT / ADD1 connection	ADD0 connection	Alert functionality enabled	Device address (bin)	Device address (hex)
SCL	VSS	No	101 0100	0x54
SCL	VDD	No	101 0101	0x55
SCL	SDA	No	101 0110	0x56
SCL	SCL	No	101 0111	0x57
VSS	VSS	No	101 1000	0x58
VSS	VDD	No	101 1001	0x59
VSS	SDA	No	101 1010	0x5A
VSS	SCL	No	101 1011	0x5B

ALERT / ADD1 connection	ADD0 connection	Alert functionality enabled	Device address (bin)	Device address (hex)
Pull up to VDD	VSS	Yes	101 1000	0x58
Pull up to VDD	VDD	Yes	101 1001	0x59
Pull up to VDD	SDA	Yes	101 1010	0x5A
Pull up to VDD	SCL	Yes	101 1011	0x5B

6.3.4 Read/write operation (读/写操作)

In order to access an internal data register, the index register must be written in advance. This register contains the actual register address and selects the appropriate register for an access. A typical transfer consists of the transmission of the slave address with a write operation indication, followed by the transmission of the register address and is finalized with the actual register content data transfer. This implies that every write operation to the temperature sensor device requires a value for the index register prior to the transmission of the actual register data.

The index register defines the register address for both the write and read operation. Consequently, if a read operation is executed, the register address is taken from the index register which was defined from the last write operation.

If a different register needs to be read, the index register has to be written in advance to define the new register address. This is accomplished by transmitting the slave address with a low R/W bit, followed by the new content of the index register. Subsequently, the master provokes a START condition on the bus and transmits the slave address with a high R/W bit in order to initiate a read operation.

Since the index register always keeps its last value, reads can be executed repetitively on the same register.

Similarly to the byte transfer where the MSB is transmitted first, the transfer of a 16-bit word is executed by a two byte transfer whereas the MSB byte is always transmitted first.

6.3.5 Slave operation

The device employs a slave functionality only (slave transmitter and slave receiver) and cannot be operated as a bus master. Consequently, the device never actively drives the SCL line.

该设备不能作为主设备

6.3.6 Slave receiver mode (从接收模式)

Any transmission is invoked by the master device by transmitting the slave address with a low R/W bit. Subsequently, the slave device acknowledges the reception of the valid address by pulling the ninth bit to a low level. Following to acknowledge, the master transmits the content of the index register. This transfer is again acknowledged by the slave device. The next data byte(s) are written to the actual data register which is selected by the index register while each transfer is acknowledged upon a completed transfer by the slave device. A data transfer can be finished if the master transmits a START or a STOP condition on the bus.

6.3.7 Slave transmitter (从发送)

The master transmits the slave address with a high R/W bit. In turn, the slave acknowledges a valid slave address. Subsequently, the slave transmits the MSB byte of the actual selected data register by the index register. After the MSB byte transmission, acknowledge is sent by the master. Afterwards, the LSB byte is transmitted by the slave which is also acknowledged by the master after the completed transmission. The data transfer can be terminated by the master by transmitting a Not-Acknowledge after the transmitted slave data or by invoking a START or a STOP condition on the bus.

6.3.8 Alert function

If the device is configured for an interrupt mode operation (IM=1), the ALERT output can be used as an alert signal.

If the polarity bit is set to '0' (POL='0'), the alert condition bit is set to '0' in case the temperature has exceeded the configured value in register THIGH. Accordingly, the alert condition bit is set to '1' if the temperature has fallen below the configured value in register TLOW.

If the polarity bit is set to '1' (POL='1'), the alert condition bit is inverted. The following table summarizes the status of the alert condition bit with different alert conditions and polarity configurations.

Table 22: Alert condition bit

Polarity bit	Alert condition	Alert condition bit (AC-Bit)
0	$T \geq THIGH$	0
0	$T \leq TLOW$	1
1	$T \geq THIGH$	1

Polarity bit	Alert condition	Alert condition bit (AC-Bit)
1	$T \leq T_{LOW}$	0

6.3.9 High speed mode

The bus operation is limited to 400 kHz unless a high speed command is issued by the master device as the first byte after a START condition. This switches the bus to a high speed operation which allows data transfer frequencies up to 3.4 MHz. Such a command is not acknowledged by the slave but the input filter time constants on the serial interface (SDA and SCL) are adapted to allow the higher transfer rate.

After a high speed command, the slave address is transmitted by the master in order to invoke a data transfer. The bus keeps operating at the higher operating frequency until the master issues a STOP condition on the serial bus. Upon the reception of the STOP condition by the slave, the input filters are switched to their initial time constants which allow lower transfer rates only.

6.3.10 General call

A general call is issued by the master by transmitting the general call address (000 0000) with a low R/W bit. When this command is issued on the bus, the device acknowledges this command. The device also acknowledges the second byte but ignores the data. Subsequent bytes sent by the master during the general call are not acknowledged.

6.3.11 Start byte

When the master transmits address 000 0000 and a high R/W bit ("START byte") the device acknowledges the address. The device then send the MSB data byte and LSB data byte, where the data corresponds to the content of the register whose address has been last written to. After reset this corresponds to the temperature register.

6.3.12 Timeout function

The serial interface of the slave device is reset if the clock signal SCL is kept low for typ. 30 ms. Such a condition results in a release of the data line by the slave in case it has been

pulled to low level. The slave remains inactive after a timeout and waits for a new START command invoked by the bus master. In order to prevent a timeout, the bus transfer rate must be higher than 1 kHz. 为了防止超时，主线传输速率必须高于1KHz

6.3.13 Bus conditions

The following conditions occur on the serial bus which is compatible to the I²C-Bus.

Bus idle

The signals SDA and SCL are not actively driven and pulled to a high level by an external pull-up resistor.

Start data transfer

A transition of the SDA input from high to low level while the SCL signal is kept at high level results in a START condition. Such a START condition must precede any data transfer.

Stop data transfer

A transition of the SDA input from low to high level while the SCL signal is kept at high level results in a STOP condition. Any data transfer is finished by generating a STOP or START condition.

Data transfer

The master device defines the number of data bytes between a START and STOP condition and there is no limitation in the amount of data to be transmitted.

If it is desired to read only a single MSB byte without the LSB byte, a termination of the data transfer can be provoked by issuing a START or STOP condition on the bus.

Acknowledge

It is mandatory for each slave device to respond with acknowledge if the device is addressed by the master. Acknowledge is indicated by pulling down the data line (SDA) while the clock signal (SCL) is high in the acknowledge clock phase. In order to avoid an unwanted START or STOP condition on the bus, setup and hold times must be met.

The master can signal an end of data transmission by transmitting a Not-Acknowledge on the last transmitted data byte by keeping the acknowledge bit at high level.

6.3.14 Timing characteristics

Figure 9: Serial interface timing diagram (串行接口时序图)

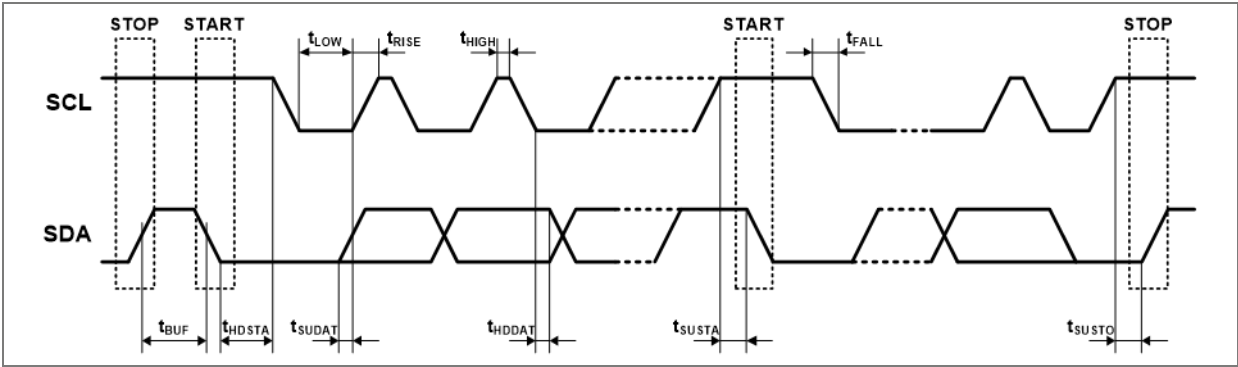


Table 23: Bus timing specifications

		快速模式1KHz~400KHz		高速模式1KHz~3.4MHz		
Parameter	Symbol	Fast mode		High speed mode		Unit
		Min	Max	Min	Max	
SCL clock frequency	f _{SCL}	0.001	0.4	0.001	3.4	MHz
Bus free time between STOP and START condition	t _{BUF}	600		160		ns
Hold time after repeated START condition	t _{HDSTA}	100		100		ns
Repeated START condition setup time	t _{SUSTA}	100		100		ns
Data in hold time	t _{HDDAT}	0		0		ns
Data out hold time ⁽¹⁾	t _{DH}	100		100		ns
Data setup time	t _{SUDAT}	100		10		ns
SCL clock low period	t _{LOW}	1300		160		ns
SCL clock high period	t _{HIGH}	600		60		ns
Clock/data fall time	t _F		300		80	ns
Clock/data rise time	t _R		300		80	ns
Clock/data rise time for SCL ≤ 100 kHz	t _R		1000			ns

(1) The device will hold the SDA line high for 100 ns during the falling edge of the SCL.

6.3.15 Timing diagrams

The following timing diagrams depict the different bus operation modes and data transmission:

Figure 10: Timing diagram for word write (写字节时序图)



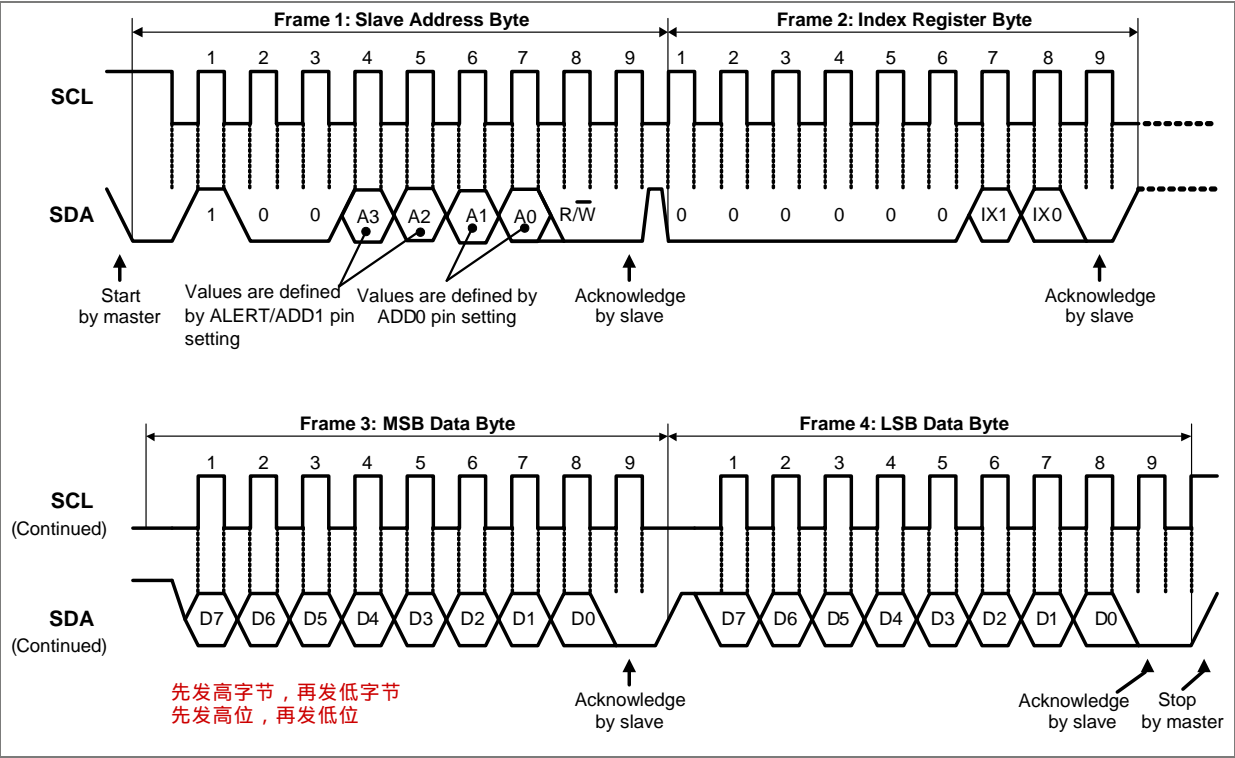


Figure 11: Timing diagram for word read (读字节时序图)

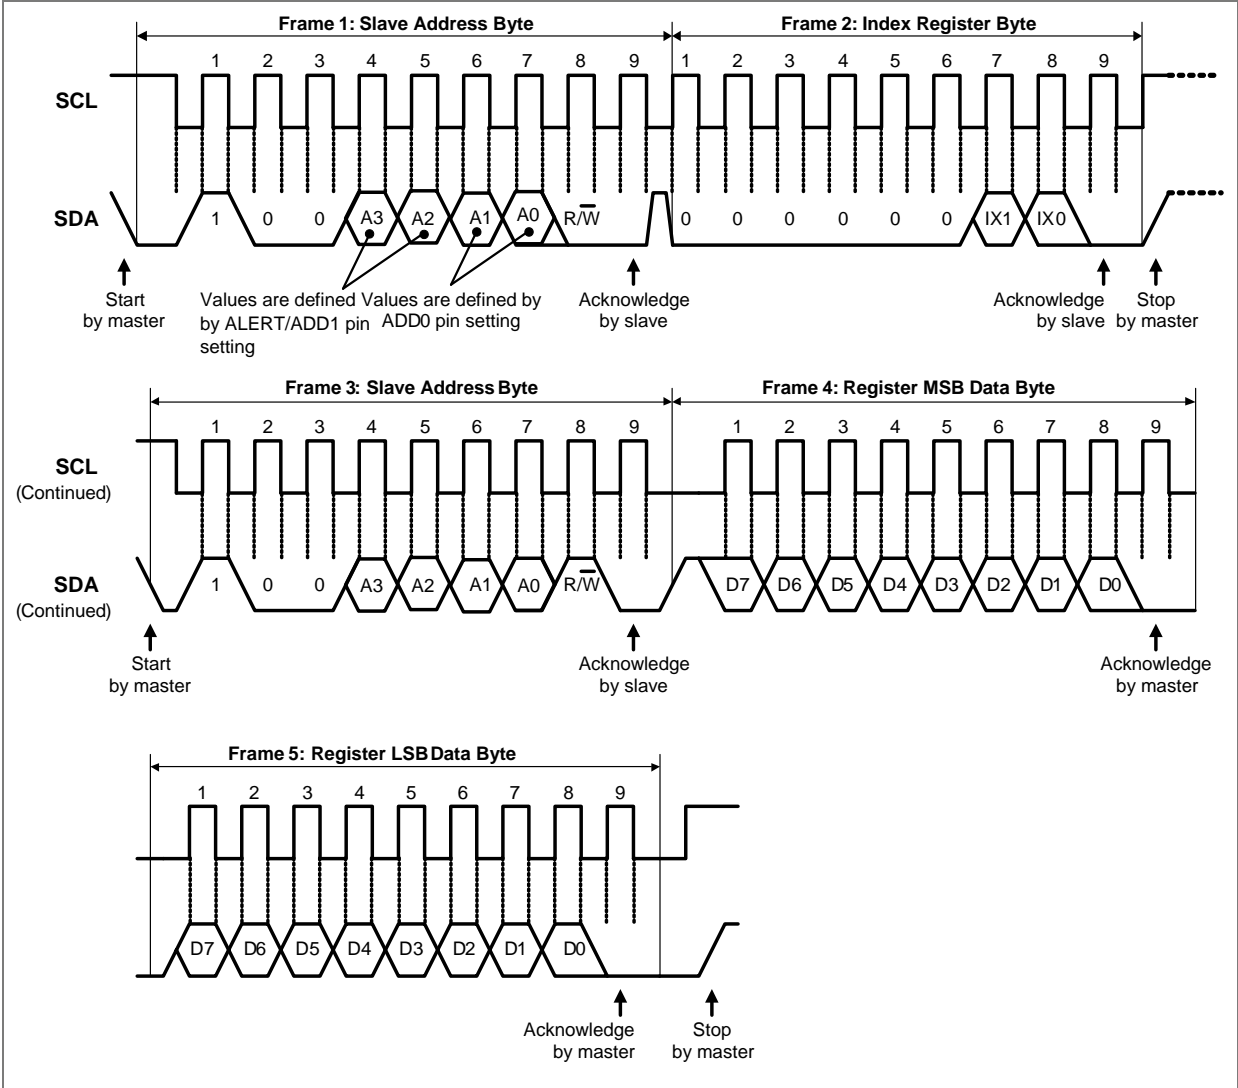

7 Application information


Figure 12: Application example with using the ALERT functionality

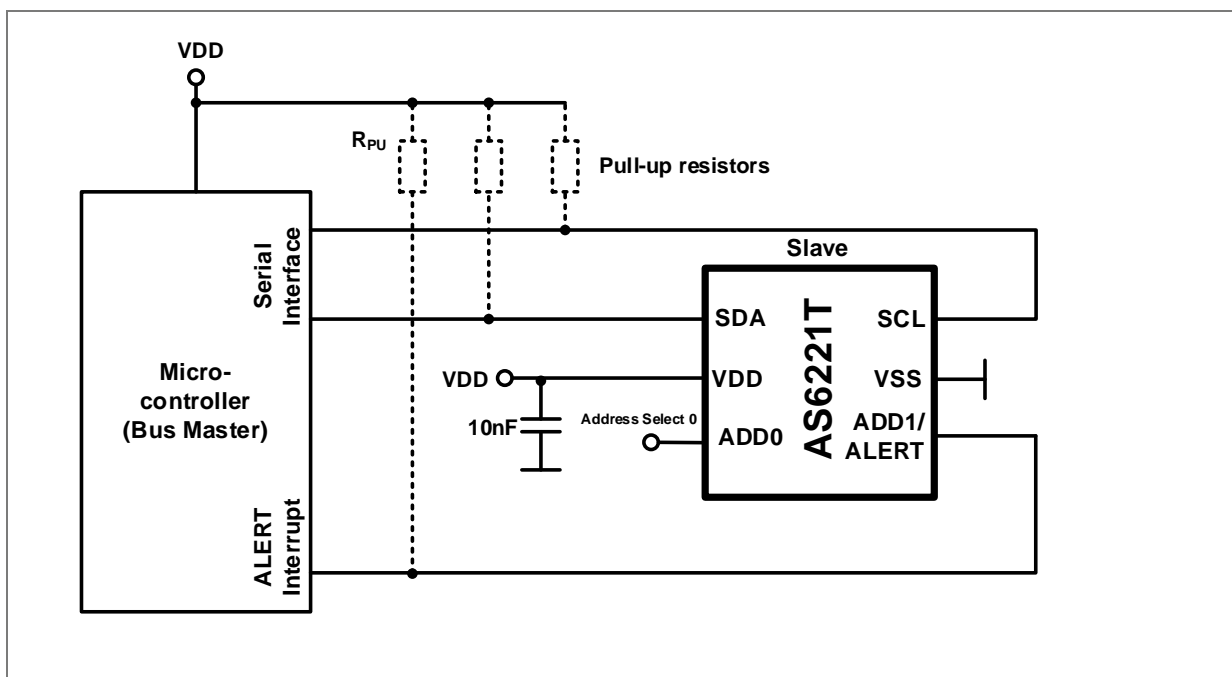

In Figure 12, the connections of the AS6221T temperature sensor to a microcontroller and the supply voltage are shown.

The AS6221T is connected to a microcontroller via an I²C bus (SDA and SCL only). Additionally the Alert output can also be used for temperature monitoring (e.g. using the interrupt mode, refer to IM bit settings), an example is given in Figure 12 where the Alert output is connected to microcontroller.

Figure 13: Application example without using the ALERT functionality

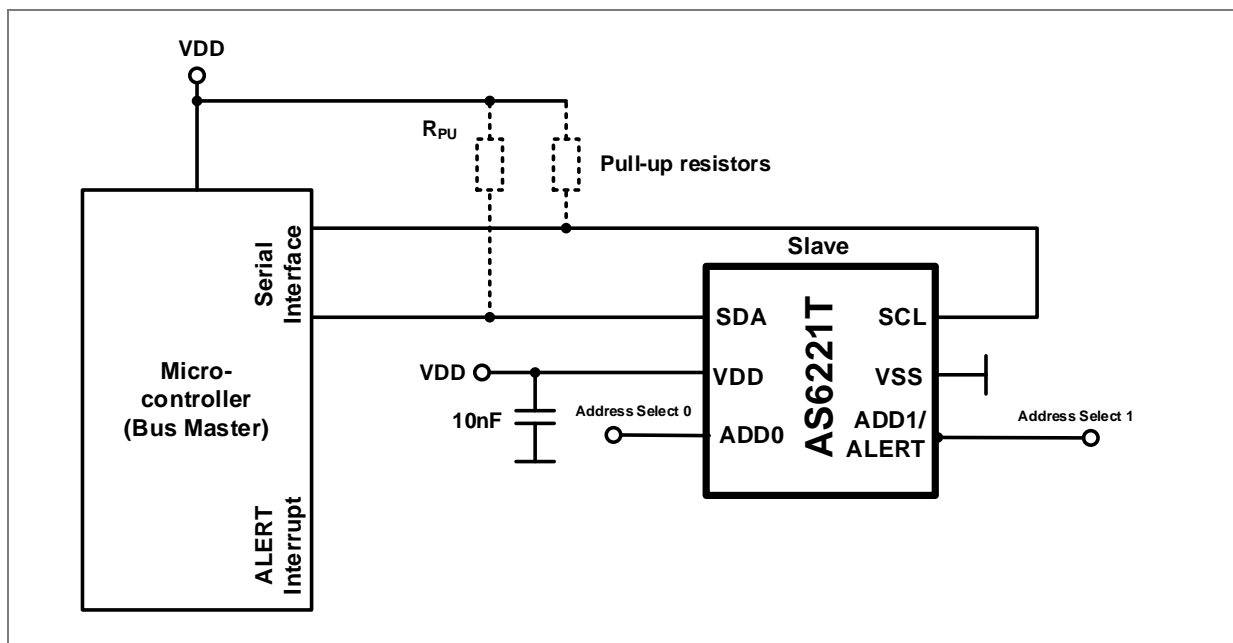

In Figure 13, the connection without using the Alert functionality is shown. In this case the ADD1/ALERT pin is used to increase the amount of available I²C addresses.

The I²C address of the AS6221T can be selected by connecting the ADD0 and ADD1 to different pins (refer to Table 21 for details). These pins must not be left unconnected.

7.1 External components

Figure 14: Schematic with external components

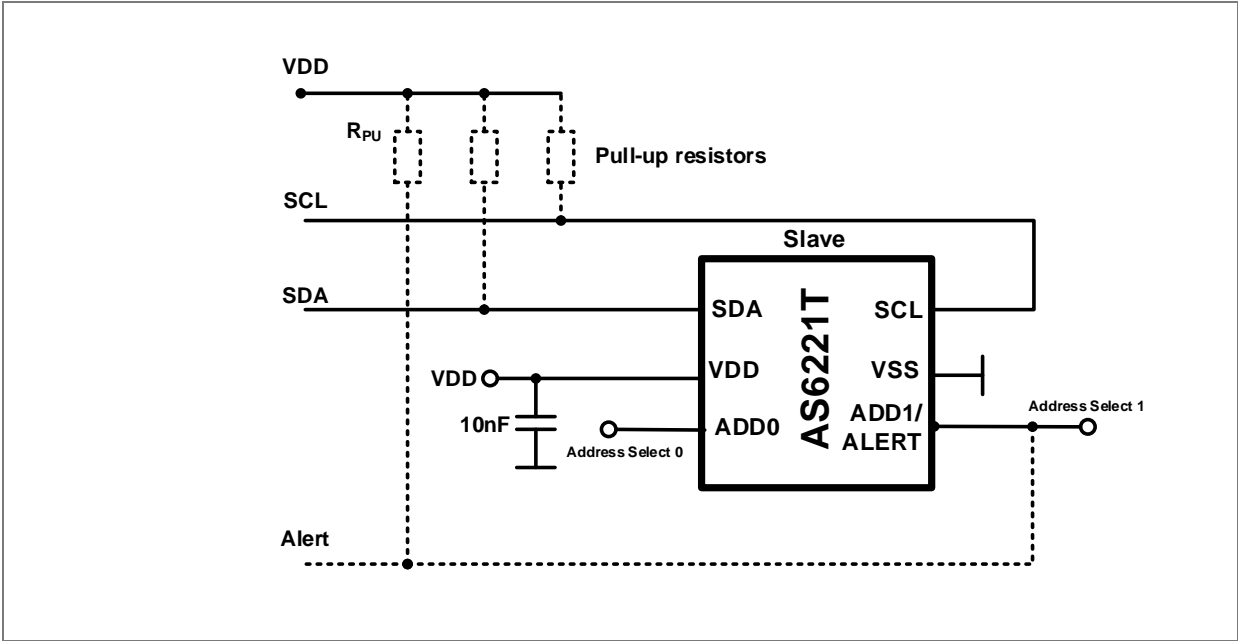


Table 24: Values for external components

Parameter	Min	Typ	Unit
Decoupling capacitor (去耦电容)	10		nF
Pull-up resistors (上拉电阻)		10	kΩ

In Figure 14 and Table 24 the schematics and the recommended values for external components are shown.

The decoupling capacitor for the supply should have a value of at least 10 nF.


In order to use the alert functionality, the ALERT/ADD1 pin must be connected via a pull up resistor to VDD.

For the serial interface, pull up resistors to VDD are mandatory.

The pull up resistors on the serial interface and the interrupt depend on the bus capacitance and on the clock speed.

8 Package drawings & markings

Figure 15: WLCSP outline drawing

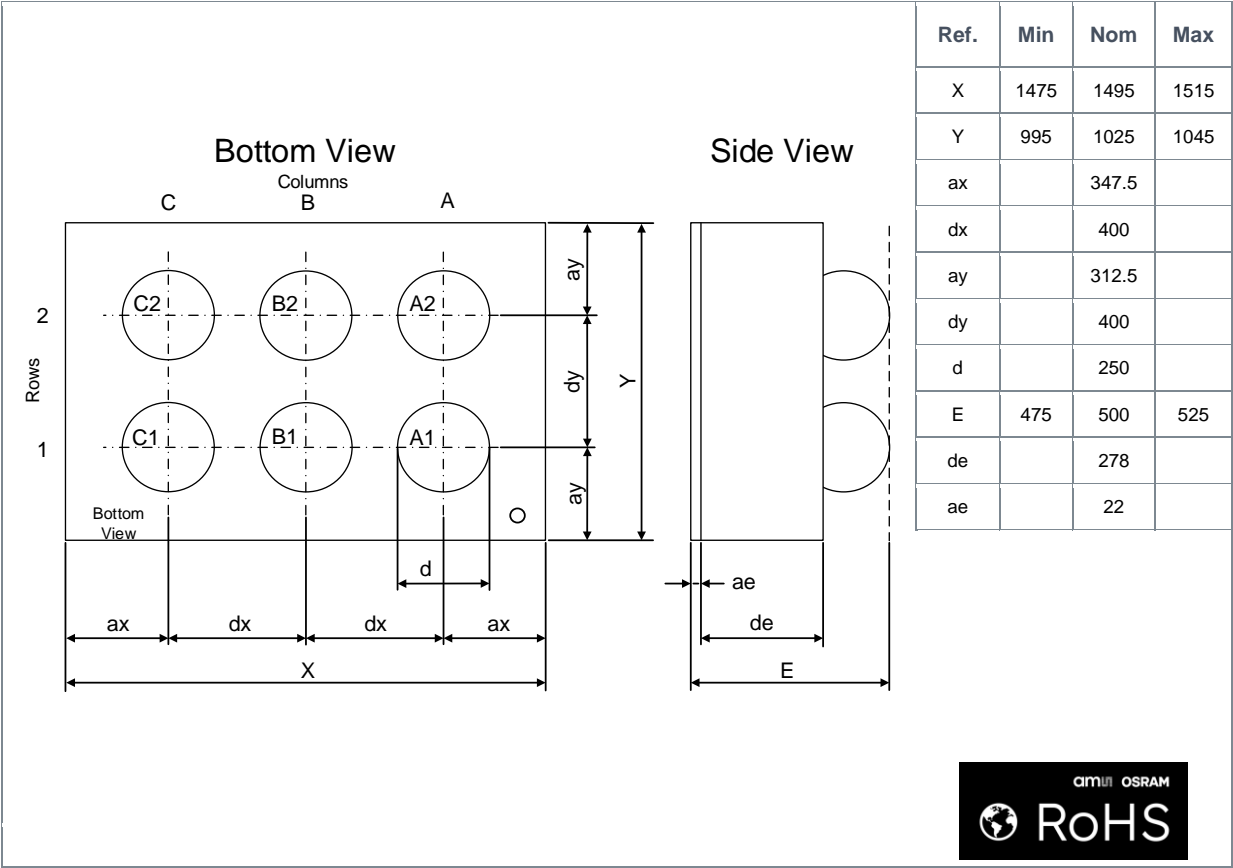

- (1) All dimensions are in micrometers. Angles in degrees.
- (2) Dimensioning and tolerancing conform to ASME Y14.5M-1994.
- (3) This package contains no lead (Pb).
- (4) This drawing is subject to change without notice.

Figure 16: WLCSP package marking/code for AS6221T



9 Revision information

Document status	Product status	Definition
Product Preview	Pre-development	Information in this datasheet is based on product ideas in the planning phase of development. All specifications are design goals without any warranty and are subject to change without notice
Preliminary Datasheet	Pre-production	Information in this datasheet is based on products in the design, validation or qualification phase of development. The performance and parameters shown in this document are preliminary without any warranty and are subject to change without notice
Datasheet	Production	Information in this datasheet is based on products in ramp-up to full production or full production which conform to specifications in accordance with the terms of ams-OSRAM AG standard warranty as given in the General Terms of Trade

Other definitions

Draft / Preliminary:
The draft / preliminary status of a document indicates that the content is still under internal review and subject to change without notice. ams-OSRAM AG does not give any warranties as to the accuracy or completeness of information included in a draft / preliminary version of a document and shall have no liability for the consequences of use of such information.

Short datasheet:
A short datasheet is intended for quick reference only, it is an extract from a full datasheet with the same product number(s) and title. For detailed and full information always see the relevant full datasheet. In case of any inconsistency or conflict with the short datasheet, the full datasheet shall prevail.

Changes from previous released version to current revision v3-00	Page
Update Device Address (bin) section	23

- Page and figure numbers for the previous version may differ from page and figure numbers in the current revision.
- Correction of typographical errors is not explicitly mentioned.

10 Legal information

Copyright & disclaimer

Copyright ams-OSRAM AG, Tobelbader Strasse 30, 8141 Premstaetten, Austria-Europe. Trademarks Registered. All rights reserved. The material herein may not be reproduced, adapted, merged, translated, stored, or used without the prior written consent of the copyright owner.

Devices sold by ams-OSRAM AG are covered by the warranty and patent indemnification provisions appearing in its General Terms of Trade. ams-OSRAM AG makes no warranty, express, statutory, implied, or by description regarding the information set forth herein. ams-OSRAM AG reserves the right to change specifications and prices at any time and without notice. Therefore, prior to designing this product into a system, it is necessary to check with ams-OSRAM AG for current information. This product is intended for use in commercial applications. Applications requiring extended temperature range, unusual environmental requirements, or high reliability applications, such as military, medical life-support or life-sustaining equipment are specifically not recommended without additional processing by ams-OSRAM AG for each application. This product is provided by ams-OSRAM AG "AS IS" and any express or implied warranties, including, but not limited to the implied warranties of merchantability and fitness for a particular purpose are disclaimed.

ams-OSRAM AG shall not be liable to recipient or any third party for any damages, including but not limited to personal injury, property damage, loss of profits, loss of use, interruption of business or indirect, special, incidental or consequential damages, of any kind, in connection with or arising out of the furnishing, performance or use of the technical data herein. No obligation or liability to recipient or any third party shall arise or flow out of ams-OSRAM AG rendering of technical or other services.

Product and functional safety devices/applications or medical devices/applications:

ams-OSRAM AG components are not developed, constructed or tested for the application as safety relevant component or for the application in medical devices. ams-OSRAM AG products are not qualified at module and system level for such application.

In case buyer – or customer supplied by buyer – considers using ams-OSRAM AG components in product safety devices/applications or medical devices/applications, buyer and/or customer has to inform the local sales partner of ams-OSRAM AG immediately and ams-OSRAM AG and buyer and/or customer will analyze and coordinate the customer-specific request between ams-OSRAM AG and buyer and/or customer.

ams OSRAM semiconductor RoHS compliance statement

RoHS compliant: The term RoHS compliant means that ams-OSRAM AG semiconductor products fully comply with current RoHS directives. Our semiconductor products do not contain any chemicals for all 6 substance categories plus additional 4 substance categories (per amendment EU 2015/863), including the requirement that lead not exceed 0.1% by weight in homogeneous materials.

Important information: The information provided in this statement represents ams-OSRAM AG knowledge and belief as of the date that it is provided. ams-OSRAM AG bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. ams-OSRAM AG has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. ams-OSRAM AG and ams-OSRAM AG suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

Headquarters

ams-OSRAM AG
Tobelbader Strasse 30
8141 Premstaetten
Austria, Europe
Tel: +43 (0) 3136 500 0

Please visit our website at ams-osram.com

For information about our products go to [Products](#)

For technical support use our [Technical Support Form](#)

For feedback about this document use [Document Feedback](#)

For sales offices and branches go to [Sales Offices / Branches](#)

For distributors and sales representatives go to [Channel Partners](#)